

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
22 April 2004 (22.04.2004)

PCT

(10) International Publication Number
WO 2004/033738 A1

- (51) International Patent Classification⁷: C22B 003/06, 047/00, C25B 001/21
- (21) International Application Number: PCT/AU2003/001295
- (22) International Filing Date: 1 October 2003 (01.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 2002952042 10 October 2002 (10.10.2002) AU
- (71) Applicant (for all designated States except US): HITEC ENERGY LIMITED [AU/AU]; 1/1 Walker Avenue, West Perth, Western Australia 6005 (AU).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): WARD, Christopher, Brett [AU/AU]; 19 Palmer Street, Attadale, Western Australia 6156 (AU).
- (74) Agent: WRAY & ASSOCIATES; Level 4, The Quadrant, 1 William Street, Perth, Western Australia 6000 (AU).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: HYDROMETALLURGICAL PROCESSING OF MANGANESE CONTAINING MATERIALS

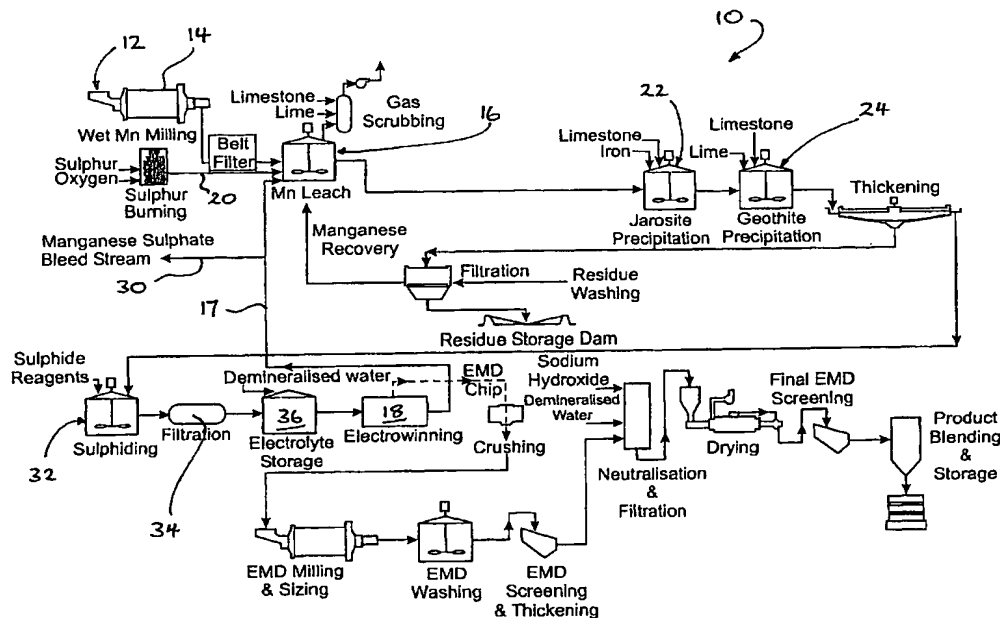

(57) Abstract: A process for the hydrometallurgical processing of manganese containing materials, the process characterised by the combination of a manganese dioxide containing feedstock and an acidic solution to form a leach solution, and passing a volume of sulphur dioxide gas through that leach solution, whereby the levels of dithionate ion generated in the leach solution are less than about 5g/l. Also described is a process for the production of electrolytic manganese dioxide.

"Hydrometallurgical Processing of Manganese Containing Materials"

Field of the Invention

The present invention relates to the hydrometallurgical processing of manganese containing materials. More particularly, the process of the present invention is
5 intended to allow efficient hydrometallurgical processing of low-grade manganese dioxide feedstock to produce manganese products, including electrolytic manganese dioxide.

Background Art

It is generally known that manganese may be leached from manganese dioxide
10 containing ores using sulphur dioxide. However, the sulphur dioxide leaching of manganese dioxide containing materials is also known to produce by-product dithionate ion levels of >5g/l. These levels may be far higher depending upon the amount of manganese being leached. For example, levels of about 20g/l are not uncommon. Interestingly, it is reported in Cotton and Wilkinson, Advanced
15 Inorganic Chemistry, 3rd Edition at page 452, that "the method for production of dithionate or dithionic acid is the reaction between sulphur dioxide or sulphite with manganese dioxide in the presence of acid".

Low grade manganese dioxide feedstock (<40% Mn) are presently uneconomic to process using conventional roast-reduction and sulphuric acid leaching to
20 produce manganese sulphate. High grade ores (>40% Mn) are needed to justify the economics of the roast reduction process. Presently, all leaching of manganese dioxide containing materials using sulphur dioxide leads to the formation of >5g/l levels of dithionate ions in solution. With dithionate ion levels of this magnitude it is generally necessary to incorporate into any flow sheet a
25 high capital cost stage, being "oxidation" or "aging". The long residence times required to "oxidise" the dithionate ion from the >5g/l levels down to lower than 1g/l are highly capital intensive.

Failure to control dithionate levels in the production of a manganese sulphate crystal product has previously led to the manganese dithionate contaminant in that product slowly reacting to release sulphur dioxide gas.

It would prove advantageous to provide a process whereby low-grade
5 manganese dioxide containing materials or feedstock could provide manganese sulphate leach solutions with a level of dithionate ion less than about 5g/l, and preferably less than 1g/l.

The ability to recover manganese dioxide from low-grade feedstocks will avoid or at least reduce the need for further manganese ore mining and land disturbance,
10 bringing various environmental benefits. For example, the utilisation of manganese tailings allows for conservation of existing resources.

Further, the use of a hydrometallurgical route for the reduction of Mn(IV) negates the need for the use of gas fired kilns or fluid bed reactors, feed stocks no longer need to be heated to about 1000°C and then cooled prior to leaching, and there
15 is lesser need for carbon input, which in turn results in lower greenhouse gas emissions.

Still further, the use of the relatively easily controlled hydrometallurgical route allows monitoring of the solution potential of the leach solution or slurry thereby indicating complete dissolution of Mn(IV). The use of the sulphur dioxide leach
20 provides complete conversion of Mn(IV) to Mn(II), thereby avoiding the production of leachable manganese species in solid residues.

In particular, if it is desired to produce electrolytic manganese dioxide ("EMD"), solutions containing elevated dithionate ion levels result in chemical reactions occurring that effect the quality and purity of the EMD produced in the
25 electrowinning cells. Also, hydrogen sulphide is evolved, bringing with it certain occupational health and environmental issues.

The preceding discussion of the background art is intended to facilitate an understanding of the present invention only. It should be appreciated that the

discussion is not an acknowledgement or admission that any of the material referred to was part of the common general knowledge in Australia as at the priority date of the application.

- Throughout the specification, unless the context requires otherwise, the word
- 5 "comprise" or variations such as "comprises" or "comprising", will be understood to imply the inclusion of a stated integer or group of integers but not the exclusion of any other integer or group of integers.

Disclosure of the Invention

- In accordance with the present invention there is provided a process for the
- 10 hydrometallurgical processing of manganese containing materials, the process characterised by the combination of a manganese dioxide containing feedstock and an acidic solution to form a leach solution, and passing a volume of sulphur dioxide gas through that leach solution, whereby the levels of dithionate ion generated in the leach solution are less than about 5g/l.
- 15 Preferably, the levels of dithionate ion generated in the leach solution are less than about 1g/l.

Still preferably, the pH of the leach solution is maintained at less than about 1.5.

- In one form of the invention the leach solution comprises a slurry of manganese dioxide containing material at a slurry density of less than about 10%w/v, less
- 20 than about 120g/l manganese sulphate, a temperature of greater than about 95°C, and at a pH of less than about 1.5.

In another form of the invention the manganese dioxide containing feedstock contains less than about 40% manganese.

- Preferably, the leach solution has an initial soluble iron concentration of greater
- 25 than 4g/l. The iron is preferably in the form of ferric sulphate ($\text{Fe}_2(\text{SO}_4)_3$). The

ferrous concentration is preferably maintained at a level below about 0.5g/l by providing an excess or residual amount of manganese dioxide in the slurry.

The ratio of ferric to ferrous may be monitored throughout the leach to ensure an oxidation reduction potential (ORP) of 550mV, or above (vs Ag/AgCl reference electrode).

5

The sulphur dioxide gas is preferably passed through the leach solution over a period of at least 10 hours whereby up to about 95% of manganese dioxide is dissolved. Preferably, the leach is conducted over a period of between about 10 to 15 hours.

10 Preferably, once a stoichiometric amount of sulphur dioxide has been added to the leach solution to achieve a 95% dissolution of the manganese dioxide present, the reaction is halted.

In accordance with present invention there is further provided a process for the production of electrolytic manganese dioxide, the process characterised by a leach of a manganese dioxide containing feedstock in acidic solution, through which a volume of sulphur dioxide gas is passed, and in which dithionate ion levels are maintained at less than about 5g/l, the resulting leach solution being processed to provide an appropriate electrolyte that is passed to an electrowinning stage during which electrolytic manganese dioxide is deposited.

15
20 Preferably, the levels of dithionate ion generated in the leach solution are less than about 1g/l.

Still preferably, the pH of the leach solution is maintained at less than about 1.5.

In one form of the invention the leach solution comprises a slurry of manganese dioxide containing material at a slurry density of less than about 10%w/v, less than about 120g/l manganese sulphate, a temperature of greater than about 95°C, and at a pH of less than about 1.5.

25

In another form of the invention the manganese dioxide containing feedstock contains less than 40% manganese.

Preferably, the leach solution has an initial soluble iron concentration of greater than 4g/l. The iron is preferably in the form of ferric sulphate ($\text{Fe}_2(\text{SO}_4)_3$). The
5 ferrous concentration is preferably maintained at a level below about 0.5g/l by providing an excess or residual amount of manganese dioxide in the slurry.

The ratio of ferric to ferrous may be monitored throughout the leach to ensure an oxidation reduction potential (ORP) of 550mV, or above (vs Ag/AgCl reference electrode).

10 The sulphur dioxide gas is preferably passed through the leach solution over a period of at least 10 hours whereby up to about 95% of manganese dioxide is dissolved. Preferably, the leach is conducted over a period of between about 10 to 15 hours.

Preferably, once a stoichiometric amount of sulphur dioxide has been added to
15 the leach solution to achieve a 95% dissolution of the manganese dioxide present, the reaction is halted.

Preferably, the acidic solution used in the leach is at least in part comprised of return or spent sulphuric acid solution from the electrowinning stage. It may be necessary to add additional acid to the leach to ensure the pH remains less than
20 about 1.5.

Brief Description of the Drawings

The present invention will now be described, by way of example only, with reference to one embodiment thereof and the accompanying drawings, in which:-

25 Figure 1 is a schematic flow chart of a process for the production of an electrolytic manganese dioxide product from a low grade manganese feedstock in accordance with the present invention;

Figure 2 is a graphical representation of the percentage manganese "leached" relative to SO₂ addition and Eh during the leach conducted within the process of Figure 1; and

5 Figure 3 is a graphical representation of the percentage manganese "leached" over time and relative to SO₂ additional during the leach of Figure 2.

Best Mode(s) for Carrying Out the Invention

In Figure 1 there is shown a process 10 for the production of electrolytic manganese dioxide (EMD) product in accordance with the present invention. A
10 manganese dioxide ore feedstock 12, containing about 34% manganese, is initially milled in a wet ball mill 14 prior to the generated slurry being passed to a leach 16 conducted in at least one agitated reactor.

In addition to the milled feedstock slurry the leach 16 is fed with return sulphuric acid electrolyte 17 from an electrowinning stage 18 to form a leach solution. The
15 leach solution has a volume of sulphur dioxide gas 20 passed therethrough, the sulphur dioxide gas 20 being formed through a sulphur burning step 22, in which sulphur is burnt in oxygen to generate sulphur dioxide.

The slurry density of the feedstock fed from the mill 14 is less than 10% w/v. The slurry is both heated and agitated, as the leach solution, once within the or each
20 reactor 16. The concentration of manganese sulphate (MnSO₄) in the leach solution is <120g/l whilst the temperature of the leach solution is >95°C. The leach solution is maintained at a pH of less than about 1.5.

The leach solution within the leach 16 has an initial soluble iron concentration of >4g/l. The iron is in the form of ferric sulphate (Fe₂(SO₄)₃). The ferrous
25 concentration is maintained at less than 0.5g/l by ensuring there is always an excess or residual amount of manganese dioxide in the leach.

The leach is conducted over a period of 10 to 15 hours by passing a volume of sulphur dioxide gas through the leach solution. The rate at which the sulphur dioxide is passed through the leach solution is governed by the requirement that up to 95% of the manganese dioxide in the slurry fed to the leach 16 is dissolved/solubilized over the period of 10 to 15 hours. It is envisaged that longer time periods may be utilised.

The ratio of ferric to ferrous in the leach 16 is monitored by an Oxidation Reduction Potential (ORP) probe. A minimum value of 550mV is required (vs Ag/AgCl reference electrode). If the ORP value falls below 550mV more feedstock slurry is added to the leach 16.

It is believed that the predominant leaching reaction proceeds as follows:



However, it is understood that whilst the process of the present invention ensures that the production of manganese sulphate is the predominant reaction, a trace of dithionate is still generated. The production of dithionate is believed to proceed as a free radical combination reaction as follows:



High pH values favour the production of dithionate. As such, the pH of the leach 16 is maintained at less than about 1.5, as noted hereinabove.

Once a stoichiometric quantity of sulphur dioxide 20 has been fed through the leach solution, whereby a maximum of 95% of the manganese dioxide present is dissolved/solubilized, the reaction is halted by withdrawing the sulphur dioxide 20 feed to the leach 16. The stoichiometric addition of SO_2 is represented graphically in Figure 2 relative to the % manganese leached and the Eh, showing that the Eh or solution potential provides an accurate indication of completion of the manganese (IV) dissolution reaction, whilst Figure 3 demonstrates the effect of sulphur dioxide addition on the % manganese leached over time.

It is envisaged that the sulphur dioxide 20 might also be provided as a waste gas from a smelting or an industrial process. Further, the sulphur dioxide might be added to the leach solution as a sulphite solution (SO_3^{2-}).

5 The remainder of the process 10 for the production of EMD involves the passing of pregnant leach solution to a jarositing step 22 to reduce potassium and sodium levels as desired. A goethiting step 24 is then used to reduce iron levels to sub-ppm levels through the addition of ground limestone. A solid/liquid separation step is then used, involving both thickening 26 and filtration 28.

10 Solids from the filtration 28 are washed to reclaim any residual manganese sulphate solution, this being fed back to the leach 16 to make up any volume lost from the return electrolyte 17 to a manganese sulphate bleed stream 30. This bleed stream 30 allows manganese sulphate to be concurrently produced for use in fertilisers, for example.

15 Overflow from the thickening 26 is passed to a sulphiding step 32 for the removal of heavy metals, including nickel, cobalt and molybdenum. Following the sulphiding step 32 the heavy metal sulphides are removed by pressure filtration 34 and the electrolyte from the electrowinning step 18 held in storage tanks 36.

20 The electrowinning step 18 then proceeds utilising submerged titanium anodes, tubular copper cathodes and a totally wax free environment. Fully laden anodes are harvested on a two-weekly cycle with resulting EMD chip being passed to produce processing and packaging operations.

25 It is envisaged that the process of the present invention, specifically as it resides in the leaching of manganese containing feedstocks to produce leach solutions with dithionate ion levels of less than 5g/l, and preferably less than 1g/l, may be applied to the processing of all types of manganese dioxide containing ores (including both high and low grade), mine tailings, fines, fumes and tailings of manganese ferro-alloy production facilities, ocean floor manganese nodules, ferromanganese nodules, wastes from zinc refinery cells and manganese dioxide contained in used or partially used alkaline or carbon zinc batteries. The leach

solutions generated by reprocessing such materials in accordance with the present invention can then be purified and used in the production of EMD, EMM and other manganese chemical products.

Modifications and variations such as would be apparent to the skilled addressee
5 are considered to fall within the scope of the present invention.

Claims

1. A process for the hydrometallurgical processing of manganese containing materials, the process characterised by the combination of a manganese dioxide containing feedstock and an acidic solution to form a leach solution, and passing a volume of sulphur dioxide gas through that leach solution, whereby the levels of dithionate ion generated in the leach solution are less than about 5g/l.
2. A process according to claim 1, wherein the levels of dithionate ion generated in the leach solution are less than about 1g/l.
3. A process according to claim 1 or 2, wherein the pH of the leach solution is maintained at less than about 1.5.
4. A process according to any one of the preceding claims, wherein the leach solution comprises a slurry of manganese dioxide containing material at a slurry density of less than about 10%w/v, less than about 120g/l manganese sulphate, a temperature of greater than about 95°C, and at a pH of less than about 1.5.
5. A process according to any one of the preceding claims, wherein the manganese dioxide containing feedstock contains less than about 40% manganese.
6. A process according to any one of the preceding claims, wherein the leach solution has an initial soluble iron concentration of greater than 4g/l.
7. A process according to claim 6, wherein the iron is in the form of ferric sulphate ($\text{Fe}_2(\text{SO}_4)_3$).
8. A process according to any one of the preceding claims, wherein the ferrous concentration is maintained at a level below about 0.5g/l by

providing an excess or residual amount of manganese dioxide in the slurry.

- 5 9. A process according to any one of the preceding claims, wherein the ratio of ferric to ferrous is monitored at least at intervals throughout the leach to ensure an oxidation reduction potential (ORP) of 550mV, or above (vs Ag/AgCl reference electrode).
- 10 10. A process according to any one of the preceding claims, wherein the sulphur dioxide gas is preferably passed through the leach solution over a period of at least 10 hours whereby up to about 95% of manganese dioxide is dissolved.
11. A process according to any one of the preceding claims, wherein the leach is conducted over a period of between about 10 to 15 hours.
- 15 12. A process according to any one of the preceding claims, wherein once a stoichiometric amount of sulphur dioxide has been added to the leach solution to achieve a 95% dissolution of the manganese dioxide present, the reaction is halted.
- 20 13. A process for the production of electrolytic manganese dioxide, the process characterised by a leach of a manganese dioxide containing feedstock in acidic solution, through which a volume of sulphur dioxide gas is passed, and in which dithionate ion levels are maintained at less than about 5g/l, the resulting leach solution being processed to provide an appropriate electrolyte that is passed to an electrowinning stage during which electrolytic manganese dioxide is deposited.
- 25 14. A process according to claim 13, wherein the levels of dithionate ion generated in the leach solution are less than about 1g/l.
15. A process according to claim 13 or 14, wherein the pH of the leach solution is maintained at less than about 1.5.

- 5 16.A process according to any one of claims 13 to 15, wherein the leach solution comprises a slurry of manganese dioxide containing material at a slurry density of less than about 10%w/v, less than about 120g/l manganese sulphate, a temperature of greater than about 95°C, and at a pH of less than about 1.5.
- 17.A process according to any one of claims 13 to 16, wherein the manganese dioxide containing feedstock contains less than 40% manganese.
- 10 18.A process according to any one of claims 13 to 17, wherein the leach solution has an initial soluble iron concentration of greater than 4g/l.
- 19.A process according to claim 18, wherein the iron is in the form of ferric sulphate ($\text{Fe}_2(\text{SO}_4)_3$).
- 15 20.A process according to any one of claims 13 to 19, wherein the ferrous concentration is maintained at a level below about 0.5g/l by providing an excess or residual amount of manganese dioxide in the slurry.
- 21.A process according to any one of claims 13 to 20, wherein the ratio of ferric to ferrous is monitored throughout the leach to ensure an oxidation reduction potential (ORP) of 550mV, or above (vs Ag/AgCl reference electrode).
- 20 22.A process according to any one of claims 13 to 21, wherein the sulphur dioxide gas is passed through the leach solution over a period of at least 10 hours whereby up to about 95% of manganese dioxide is dissolved.
- 23.A process according to any one of claims 13 to 22, wherein the leach is conducted over a period of between about 10 to 15 hours.
- 25 24.A process according to any one of claims 13 to 23, wherein once a stoichiometric amount of sulphur dioxide has been added to the leach


solution to achieve a 95% dissolution of the manganese dioxide present, the reaction is halted.

25. A process according to any one of claims 13 to 24, wherein the acidic solution used in the leach is at least in part comprised of return or spent sulphuric acid solution from the electrowinning stage.

26. A process according to any one of claims 13 to 25, wherein additional acid is added to the leach to ensure the pH remains less than about 1.5.

27. A process for the hydrometallurgical processing of manganese containing materials, the process substantially as hereinbefore described with reference to the accompanying figures.

28. A process for the production of electrolytic manganese dioxide, the process substantially as hereinbefore described with reference to the accompanying figures.

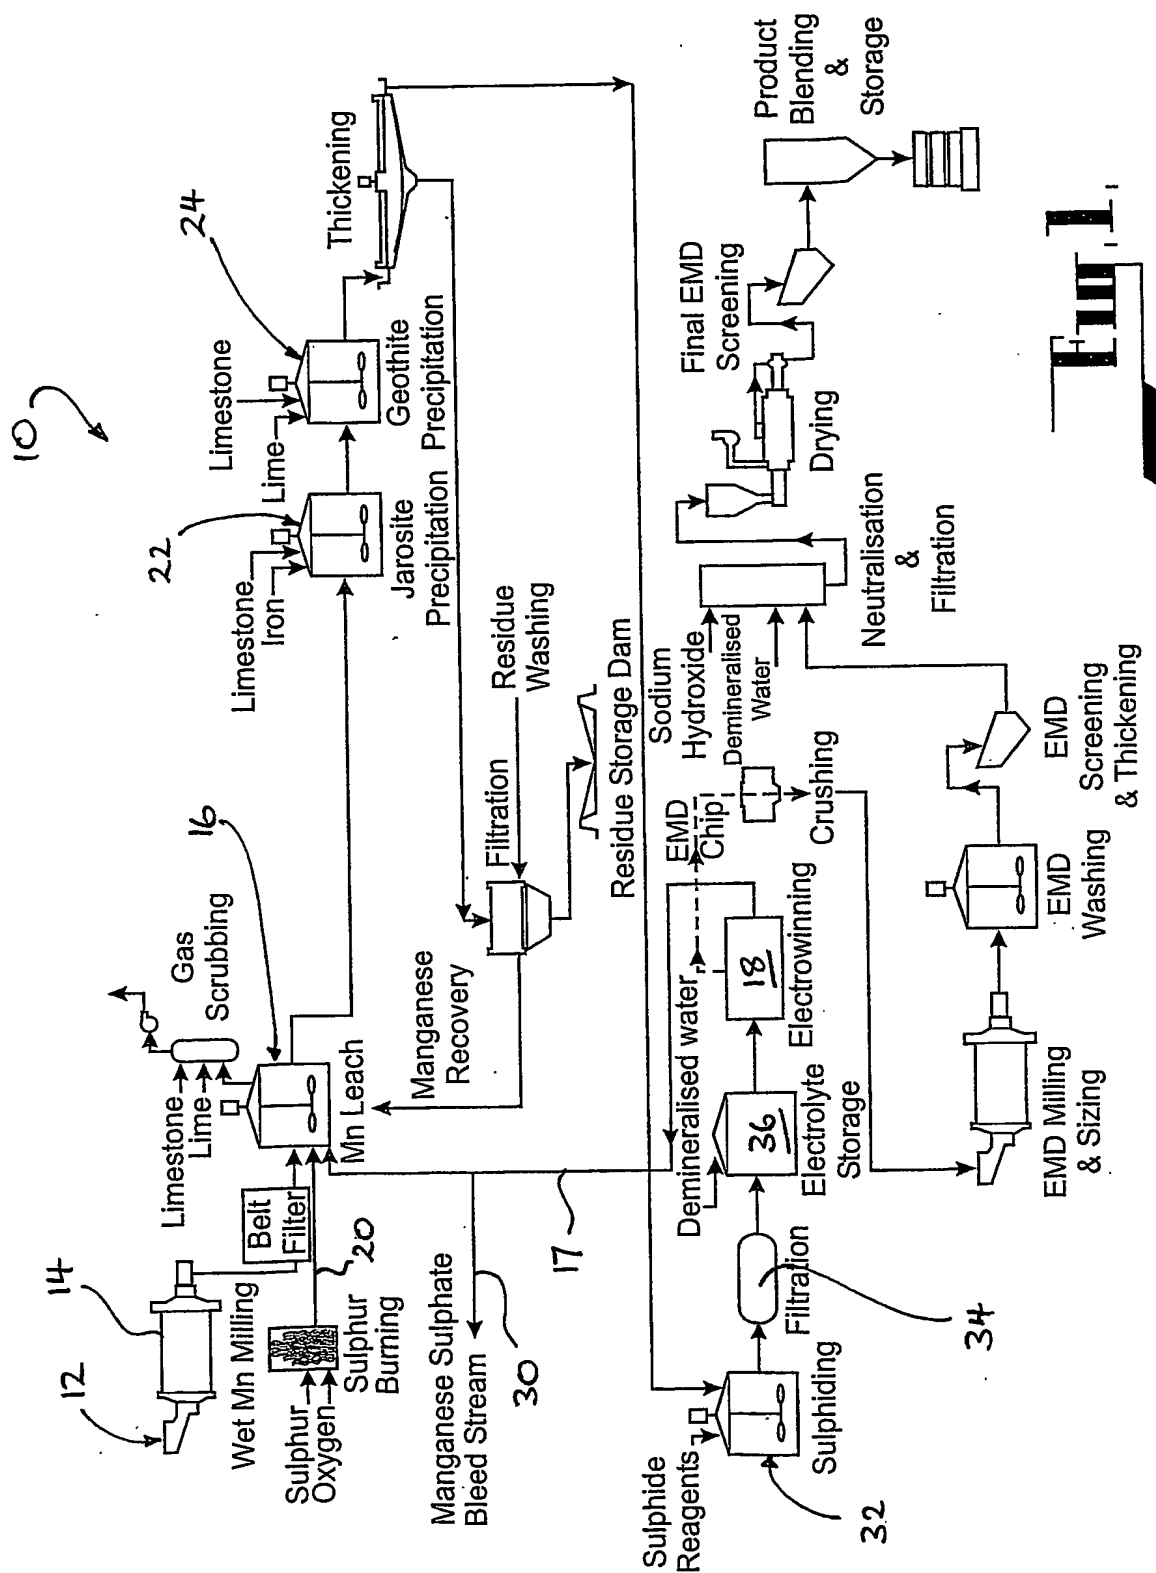

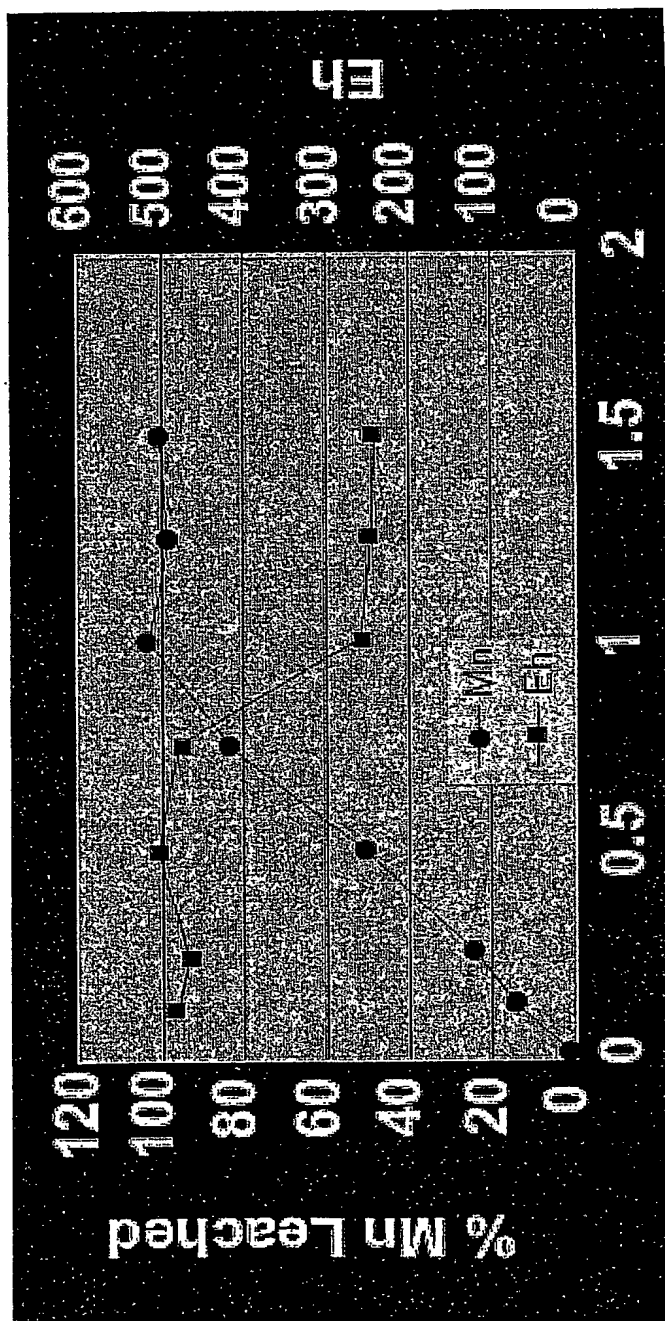


Fig. 2

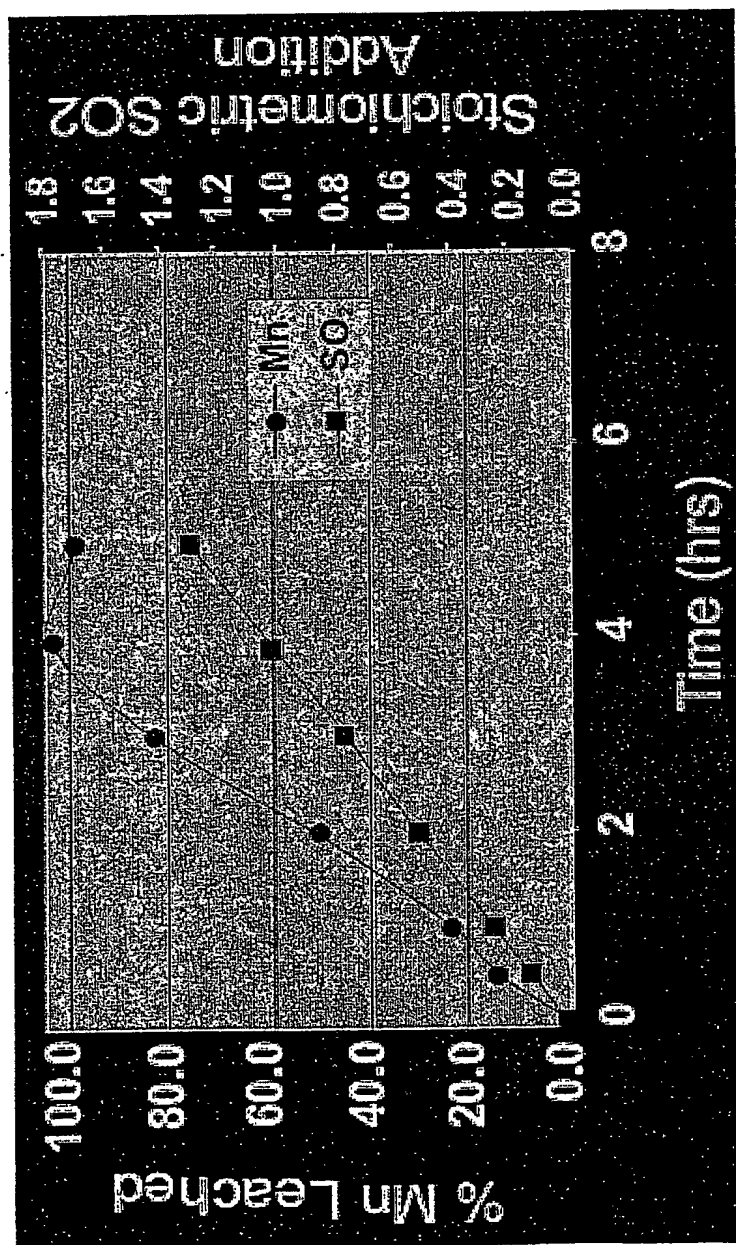


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU03/01295

A. CLASSIFICATION OF SUBJECT MATTER		
Int. Cl. 7: C22B 003/06,C22B 047/00,C25B 001/21		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) See electronic data base below		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) DWPI IPC C22B 003/06,C22B 047/00,C25B 001/21 and keywords dithionate or sulphur dioxide and manganese		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9814623 A (INTERNATIONAL CURATOR RESOURCES LTD.) 9 April 1998	
A	DE 3211658 A (GRILLO WERKE AG) 6 October 1983	
<input type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex		
<p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>		
Date of the actual completion of the international search 16 October 2003		Date of mailing of the international search report 31 OCT 2003
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaaustralia.gov.au Facsimile No. (02) 6285 3929		Authorized officer G. CARTER Telephone No : (02) 6283 2154

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/AU03/01295

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member	
WO	9814623	NONE	
DE	3211658	EP	0090390
END OF ANNEX			

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.